


VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz

MODEL	ROD / BOLT SIZE (inches)	CABLE DIA. (inches)	MAXIMUM LOAD (lbs)
SCRSC-00-xx	1/4" - 1 1/4"	3/32	600
SCRSC-01-xx	1/4" - 1 1/4"	1/8	1100
SCRSC-02-xx	1/4" - 1 1/4"	3/16	2667
SCRSC-03-xx	1/4" - 1 1/4"	1/4	4400

ROD/ BOLT CODES	
CODE	SIZE (inches)
02	1/4"
04	3/8"
05	1/2"
06	5/8"
07	3/4"
08	7/8"
10	1"
12	1 1/4"

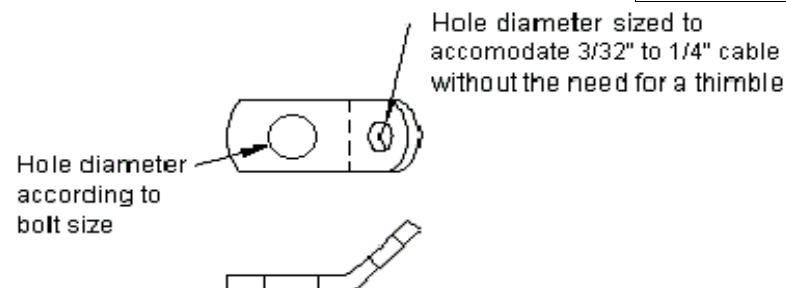

NOTES

1. While ordering specify rod/bolt size code in place of "xx"
e.g. for 1/8" cable with 1/2" bolt order SCRSC-01-05
2. Maximum load rating based on cable breaking strength.
Lower design loads may be used for project applications.
3. Each SCRSC assembly is supplied with 1 oval sleeve
4. For best results use VIMCO model SCCT crimping tools.


APPLICATION

- * For permanent attachment of cable brace to structure / equipment. Design for use with 7x19 strand core model SC seismic cable.

FEATURES

- * Complies with ASCE 19 and SMACNA Restraint Manual as required by FEMA, NEHRP, IBC, OSHPD, UNC, BOCA, SBCCI, other Building Codes
- * Permanent end fitting
- * Maintains break strength of cable and does not require thimbles
- * (2) SCRSC's can be stacked on single rod to make a 2-way brace
- * Simple installation

TYPICAL CONNECTION DETAILS

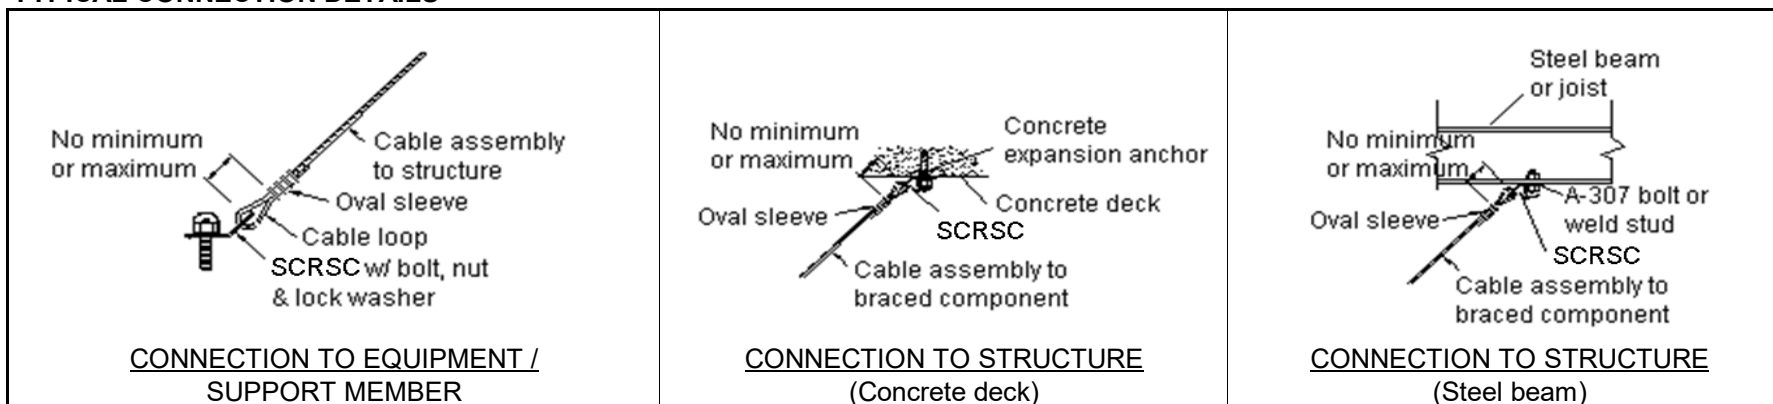

see reverse for typical applications

Notes / Remarks :

Project
Client
Consultant
Representative

Title :

SCRSC
Seismic Cable Restraint
System

Drawing no.

S-3100.33

Rev. 0

VIBRATION MANAGEMENT CORPORATION

5930 THOMAS ROAD , HOUSTON , TEXAS 77041 , U.S.A

INTERNET ADDRESS: www.vimco.biz

TYPICAL INSTALLATION DETAILS

CLEVIS TRANSVERSE	CLAMP 4-WAY	CLEVIS W/ INSULATION TRANSVERSE	CLAMP W/ INSULATION 4-WAY
TRAPEZE TRANSVERSE	TRAPEZE 4-WAY	TRAPEZE W/ INSULATION TRANSVERSE	TRAPEZE W/ INSULATION 4-WAY
CLEVIS GANGED LATERAL	CLEVIS GANGED 4-WAY	DUCTWORK TRANSVERSE	DUCTWORK 4-WAY
MULTI-DUCTWORK	OPTIONAL ATTACHMENT TO TOP	OPTIONAL ATTACHMENT TO TOP	12" (300MM) EXCEPTION RULE